Technical Specifications

HP Series 7 Pro 34 inch WQHD Conferencing Monitor - 734pm




1. Power Button

Front 2. Power LED



Technical Specifications

HP Series 7 Pro 34 inch WQHD Conferencing Monitor - 734pm

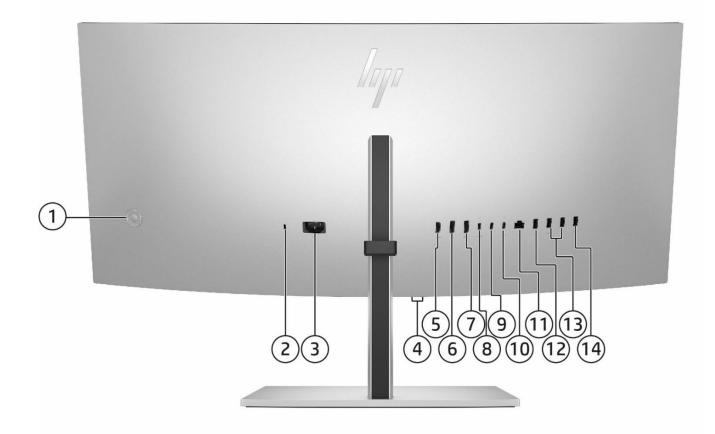

1. Joypad OSD button

- 2. Security Cable Slot
- 3. Power Connector
- USB Type-C[®] 10Gbps signaling rate (charging). (Right) USB Type-A 10Gbps signaling rate (dedicated port for keyboard for KVM switch) (Left)
- 5. HDMI 2.0 Port
- 6. DisplayPort[™] 1.4 port
- 7. DisplayPort[™] 1.4 -out port

Back

- 8 USB Type-C[®] port 10Gbps signaling rate with 65W PD and DP alt mode 1.4
- 9. Thunderbolt[™] 4 Out port for daisy chain (charging),
- Thunderbolt[™] 4 40Gbps (up to 100 W USB Power Delivery, DisplayPort[™] 1.4)
- 11. RJ-45 (10/100/1000 Mbps) (Network Port)
- 12. USB Type-A 10Gbps signaling rate, dedicated port for Text to Speech adapter
- **13.** USB Type-A port 10Gbps signaling rate
- 14. USB Type-A port 10Gbps signaling rate (charging)

Technical Specifications

Model: 8K157AA, 8K157A7, 8K157E9, 8K157AT, 8K157A5

Panel Specifications	Display Size (Diagonal)	34" (86.4 cm)
ranet specifications	Viewable Diagonal Size	34.14"(86.72 cm)
	Panel Technology	IPS Black
		1900R
	Curvature Max Refresh Rate	
		120 Hz
	Native Resolution	WQHD (3440 x 1440)
	Panel Bit Depth	True 8 bit
	Aspect Ratio	21:9
	Brightness (Typical)	400 nits
	HDR	VESA DisplayHDR™ 400
	Display Contrast Ratio (Static)	2000:1
	Flicker Free	Yes
	Pixel Pitch	0.23 x 0.23
	Pixels Per Inch (PPI)	109 PPI
	Display Colors	Up to 16.7 million colors supported*
		*Number of colors through A-FRC technology.
	Backlight Lamp Life Minimum (To Half	30k
	Brightness - In Hours)	500
	Backlight Type	Edge-lit
	Screen Treatment	Anti-glare
	Hardness	ЗН
	Haze	25%
	Response Time (Typical)	5ms GtG (with overdrive)
	Horizontal Viewing Angle	178°
	(Typical Cr>10)	170
	Vertical Viewing Angle (Typical Cr>10)	178°
	Panel Active Area Metric (W X H)	79.98 x 33.48 cm
	Panel Active Area Imperial (W X H)	31.49 x13.18 in
		the typical specifications provided by HP's component
	manufacturers; actual performance may vary	either higher or lower.
	Variable Refresh Rate Technology	AMD FreeSync™ Premium
Color	sRGB	100%
	Display P3	98%
Color Management	Factory Color Calibrated	Yes
	Calibrated Color Presets	Display P3, BT.709 D65, sRGB D65
	Color Space/ Subsampling Support	RGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2
	RGB Channel Adjust	Yes, Gain
	User Calibration Support	Host software (Windows or macOS)
	External Calibration Support	X-Rite i1Display Pro
	Standalone/ Schedulable Calibration	Yes, Schedulable
	Default Color Temperature	Display P3
	•	
Monitor Specifications	Bezel Type	3-sided borderless
	Color Of Stand	Black and Silver



Technical Specifications

Color Of Head	Black and Silver
Tilt	-5 to +20°
Swivel	±10° or ±30°*
	*For additional information call your local customer service
	representative for confirmation of your product spec and
	dimension.
Height Adjust Range	150 mm
Vesa Mounting	100 mm x 100 mm (bracket included)
Security Lock	Security lock-ready
Detachable Stand	Yes
Warranty	3/3/0 for LA, NA, EMEA, APJ
-	(3/3/3 in select APJ Countries)
Low Blue Light	Yes, HP Eye Ease (TÜV Low Blue Light Hardware Solution
-	certified)
Zero Bright Dot Guarantee	Yes*
	*The HP Pixel Policy allows no bright sub-pixel defects for this display. For complete details, see https://support.hp.com/us-
	en/document/ish_3908867-3900920-16.
Webcam	Yes, 5MP HDR
	Windows Hello support (IR sensor)
	Pop-up privacy
Webcam Features	Auto Framing
	Background Blur
	HDR
Windows hello compatible	Yes
Microphone	Yes (Dual microphones with DNN noise cancellation)
Speaker output power	4 x 3W
Certified Collaboration Software	Zoom
	HP Client Management Script Library (CMSL)*
Management Software	HP Display Center**
	* The Client Management Script Library must be downloaded to
	the connected PC to run CMSL commands. Some limitations may
	apply to legacy displays. Visit support.hp.com to download HP
	CMSL.
	**Host PC requires Windows 10 and above. HP Display Center is
	available on the Microsoft store.
On Company Diag Law	har a Calan Calif Canada hard Andia Davian Maria
On Screen Display	Image, Color, Split Screen Input, Audio, Power, Menu, Management, Information
Native Resolution	WQHD (3440 x 1440)*
	* DisplayPort™ 1.4 or HDMI 2.0 required to drive panel at its
	native resolution.
	The video card of the connected PC must be capable of
	supporting 3440 × 1440 at 120 Hz with 8-bit color using one DisplayPort™, or USB Type-C® (DisplayPort™ alt mode),
	Thunderbolt [™] .
	The video card of the connected PC must be capable of
	supporting 3440 × 1440 at 60 Hz and include 1 HDMI or 1 DisplayPort™ outputs to drive the monitor at the Preferred Mode.
	Displayment outputs to unvertie monitor at the Preferred Mode.
Maximum Resolution	WQHD (3440 X 1440 @120Hz)



On Screen Display

(OSD)

	Dresst Crashis Mades/Crisserted	C40 x 490 @ C0 U
	Preset Graphic Modes/Supported	640 x 480 @ 60 Hz
	Resolutions	640 x 480 @ 75 Hz
		720 x 400 @ 70 Hz
		800 x 600 @ 60 Hz
		800 x 600 @ 75Hz
		1024 x 768 @ 60 Hz
		1024 x 768 @ 75 Hz
		1280 x 720 @ 60 Hz
		1280 x 1024 @ 60 Hz
		1280 x 1024 @ 75 Hz
		1440 x 900 @ 60 Hz
		1600 x 900 @ 60 Hz
		1600 x 1200 @ 60 Hz
		1680 x 1050 @ 60 Hz
		1920 x 1080 @ 60 Hz
		1920 x 1200 @ 60 Hz
		2560 x 1440 @ 60 Hz
		2560 x 1440 @ 120 Hz
		3440 x 1440 @ 30 Hz
		3440 x 1440 @ 60 Hz
		3440 x 1440 @ 75Hz
		3440 x 1440 @ 100 Hz
		3440 x 1440 @ 120 Hz
	Minimum Vertical Scan Rate	30 Hz
	Maximum Vertical Scan Rate	120 Hz
	Minimum Horizontal Scan Rate	30 kHz
	Maximum Horizontal Scan Rate	190 kHz
	Maximum Pixel Clock	670 MHz
	User Programmable Modes	Yes, 23
	User-Assignable Function Buttons	Yes, 4 (9 options)
	Audio	Built-in speakers with DTS Virtual:X™Certified
	Languages	11 (German, Simplified Chinese, Traditional Chinese,
		English, Spanish, French, Italian, Japanese, Netherlands,
		Brazilian Portuguese, Russian)
Connector Types	DisplayPort™	1 DisplayPort™ 1.4
	DisplayPort™ Out	1 DisplayPort™ 1.4-out
	HDMI	1 HDMI 2.0
	HDCP	Yes, DisplayPort™, HDMI, USB Type-C [®] and Thunderbolt™ 4
	USB Type-C [®] Video & Data Transfer	1 Thunderbolt™ 4 with USB Type-C [®] 40Gbps signaling rate
		(up to 100 W USB Power Delivery, DisplayPort [™] 1.4); 1 USB
		Type-C [®] 10Gbps signaling rate (up to 65W USB Power
		Delivery, Alt Mode DisplayPort™ 1.4)
	USB Type-C [®] Data Transfer Only	1 USB Type-C [®] 10Gbps signaling rate (15 W charging)
	Thunderbolt™ Out	1 Thunderbolt™ 4 Out for Daisy chain (15 W charging)
	USB Type-A	5 USB Type-A 10Gbps signaling rate (1 charging with 7.5
		W)
	Ethernet	1 RJ-45 (10/100/1000 Mbps)



Technical Specifications

Consist Fostures	Disture in Disture Disture by Disture	Vec
Special Features	Picture-in-Picture, Picture-by-Picture Switch	Yes Next Active Input, Color, Split Screen (On/Off), Volume
	Remote Manageability	Out-of-Band MAPT, Out-of-Band WoL, PXE Boot
	User Presets	23
	Presence Detection Sensor	Yes
	User Updateable Firmware	Yes
	KVM Switch	Yes, Keyboard switch
Athen Special Features		Device Bridge 2.0
Other Special Features		Ambient Light Sensor
		Single Power On
		-
		Daisy chain Pantone validated
Power & Operating Specs	Power Supply	Internal
	Power Source	100 – 240 VAC 50/60 Hz
	Power Consumption- Max	310 W
	Energy Saving/Stand By Mode	0.5 W
	Power Consumption - Typical	51 W
Energy Star Data	Operational Mode at 100 VAC	31.4 W
Energy Star Data	Operational Mode at 115 VAC	31.33 W
	Operational Mode at 230 VAC	32.22 W
	operational mode at 250 vice	JL.LL W
EU Energy Efficiency	On-mode Power Consumption for	
Class (ErP LOT-5)	Standard Dynamic Range (SDR)	32.5 W
	ErP LOT5 Energy Efficiency Class for	d G
	Standard Dynamic Range (SDR)	Ġ
	On-mode Power Consumption for High	68 W
	Dynamic Range (HDR)	68 W
	ErP LOT5 Energy Efficiency Class	d G
	for High Dynamic Range (HDR)	Ġ
Operating Conditions	Operating Temperature - Celsius	5~35°C
Operating Conditions	Operating Temperature - Fahrenheit	41– 95°F
· · · · · · · · · · · · · · · · · · ·	Non-Operating Temperature - Celsius	-20 - 60°C
	Non-Operating Temperature -	
	Fahrenheit	-4 - 140°F
	Operating Humidity	20 – 80% Relative Humidity (non-condensing)
	Non-Operating Humidity	5~95%RH
	Operating Altitude Metric	0~5,000m
	Non-operating Altitude Metric	0~12,192m
	Operating Altitude Imperial	0~16,400ft
	Non-operating Altitude Imperial	0~40,000ft
Certifications and Compliances	Low Halogen	Yes*
		*External power supplies, WWAN modules, power cords, cables

*External power supplies, WWAN modules, power cords, cables and peripherals excluded.





	Agency Approvals and Certifications Microsoft WHQL Certification ENERGY STAR® Certified EPEAT® Registered	WW application CE,CB,KC/KCC/NOM/PSB/ICE/T EAC/UL/CSA/PSB/ISC/CCC/CEL Certified Edge/Energy Star/ISC MEPS/Ukraine EE/Belarus EE / light/UAE/Ukraine/BIS/RCM Windows 11, Windows 10 Yes EPEAT® Gold in United States* *Based on US EPEAT® registration EPEAT®. EPEAT® status varies by more information.	/CECP/SEPA/TCO/TCO C/VCCI/FCC/BSMI/Korea /WEEE/GS/Low Blue n according to IEEE 1680.1-2018
	China Energy Label TCO Certified Edge TCO Certified SmartWay Transport Partnership - NA only	CEL Grade 2 Yes Yes Yes (NA sku)	
Contains Recycled Plastics	Contains Recycled Plastics	90% post-consumer recycled *Recycled plastic content percent set in the IEEE 1680.1-2018 stan	tage is based on the definition
	Recycled Metal	90% recycled aluminum * Made with 15% recycled steel *Recycled metal is expressed as a of the metal according to ISO 140 over 25 grams.	a percentage of the total weight
	Recyclable Packaging (Box, packing materials)	Outside box and corrugated co sourced and recyclable* *100% outer box packaging and o sustainably sourced certified and	corrugated cushions made from
Unit Product/Package	Product Dimensions	<u>Metric</u> 81.38 x 26.69 x 54.74 cm or	<u>Imperial</u> 32.04 x 10.51 x 21.55 in or
Specifications	(Unpacked with stand) (W x D x H)	81.38 x 26.99 x 54.74 cm* *For additional information call y representative for confirmation c	
	Product Dimensions (Packed) (W × D × H)	dimension. 95.2 x 22.6 x 48.5 cm	37.48 x 8.9 x 19.09 in
	Display Head Dimensions (Unpacked without stand) (W x D x H)	81.38 x 12.02 x 36.41 cm	32.04 x 4.73 x 14.33 in
	Base Area Footprint (w x d mm)	320 x 235 mm or 320 x 238 mm*	12.60 x 9.25 in or 12.60 x 9.37 in*
	Bezel Measurements	*For additional information call y representative for confirmation c dimension. Top: NA	



Technical Specifications

		Sides: NA	Sides: NA
		Bottom: 18mm	Bottom: 0.71in
	Product Weight	11.35 kg	25.02 lb
	(Unpacked with stand)		
	Product Weight	17.4 kg	38.4 lb
	(Packed)		
	Product Weight	8.78 kg	19.36 lb
	(Head Only)		
Pallet Information	Pallet Dimensions	Slip Sheet: 1150 x 972 x	Slip Sheet: 45.28 x 38.27 x
	(L x W x H mm)	2441 mm (40'HQ)	96.1 inch (40'HQ)
		Pallet: 1150x972x2077 mm	Pallet: 45.28x38.27x81.77
		(40'ft)	inch (40'ft)
	Pallet Total Weight	Slip Sheet: 442.5 kg (40'HQ)	Slip Sheet: 975.5 lb (40'HQ)
	Pallet Layers	Pallet: 364.2 kg (40'ft) Slip Sheet: 5 layers (40'HQ)	Pallet: 802.9 lb (40'ft)
	Fallet Layers	Pallet: 4 layers (40'ft)	
	Pallet Product per Layer	5 sets	
		Slip Sheet: 25 sets (40'HQ)	
	Total Products per Pallet	Pallet: 20 sets (40'ft)	
	Container Load, 20-Foot	240 sets (Slip Sheet and Palle	t)
	Container Load, 40-Foot	480 sets (Slip Sheet and Palle	t)
	Container Load, 40-Foot HighQ	600 sets (Slip Sheet) and 480	sets (Pallet)
What's in the box?	AC power cord (1.83m) 5.9ft HDMI 2.0 cable (1.8m) 5.9 ft (Selected 5 USB 3.1 C-A cable (1.8m) (Selected SKL DisplayPort™ 1.4 cable (1.8m) (Selecte Thunderbolt™ cable (1m) Warranty Quick Setup Poster Color calibration report VESA Mount Adapter	ls)	
User Guide and Warranty Languages	User Guide Languages Warranty Languages	Arabic, Bahasa Indonesia, Bul Czech, Danish, Dutch, English, German, Greek, Hebrew, Hung Kazakh, Korean, Latvian, Lithu Portuguese (Brazilian), Portug Russian, Serbian, Slovak, Slov Thai, Turkey, Ukrainian English US (EN), English AP (El English UK (EN-GB), Arabic (AF (ID), Bosnian (BS), Bulgarian (I T (TW), Croatian (HR), Czech (C Estonian (ET), Finnish (FI), Fre European (FR), German (DE), C Hungarian (HU), Italian (IT), Ja Korean (KO), Latvian (LV), Lith Polish (PL), Portuguese, Brazi (PT), Romanian (RO), Russian (SK), Slovenian (SL), Spanish, Latin America (ES-MX), Swedia	, Estonian, Finnish, French, Jarian, Italian, Japanese, Janian, Norwegian, Polish, Juese (Iberian), Romanian, Jenian, Spanish, Swedish, N-AP), English LA (EN-LA), R) -17x, Bahasa Indonesia BG), Chinese-S (CN), Chinese- CS), Danish (DA), Dutch (NL), nch Canadian (FC), French Greek (EL), Hebrew (HE), Jenese (JA), Kazakh (KK), Juanian (LT), Norwegian (NO), lian (BR), Portuguese, Iberian (RU), Serbian (SR), Slovak Castilian (ES-ES), Spanish, sh (SV), Thai (TH), Turkish



(TR), Ukrainian (UK), Vietnamese (VI)

ENVIRONMENTAL DATA

Eco-Label Certifications &	This product has received or is in the process of being certified to the following approvals and				
declarations	may be labeled with one or more of these marks:				
	 IT ECO declaration US ENERGY STAR[®] 				
		gement Program (FEMP)			
		in the United States. See http:/	/www.epeat.net for		
	registration status in you	•	,		
	TCO /TCO EdgeCertified	-			
	China Energy Conservati				
		tal Protection Administration (SEPA)		
	Taiwan Green Mark				
	Korea Eco-label				
Constational black have a st	Japan PC Green label*				
Sustainable Impact	80% ITE – derived closed loo	p plastic.			
Specifications	 60% recycled metal Low halogen				
	-	cushions are 100% sustainably	sourced and recyclable		
	 Recycled Plastic cushions 		sourced and recyclable		
System Configuration	The configuration used for the Energy Consumption and Declared Noise Emissions data for				
	the Notebook model is based on a "Typically Configured Notebook".				
Energy Consumption					
(in accordance with US ENERGY					
STAR® test method)	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz		
Normal Operation (Short idle)	31.33 W	32.22 W	31.38 W		
Normal Operation (Long idle)	31.33 W	32.22 W	31.38 W		
Sleep	0.83 W	0.85 W	0.85 W		
Off	0.22 W	0.23 W	0.22 W		
	NOTE: Energy efficiency data listed is fo model family. HP computers mar	ked with the ENERGY STAR® Lo	go are compliant with the		
	applicable U.S. Environmental Pro computers. If a model family doe energy efficiency data listed is fo efficiency power supply, and a Mi	s not offer ENERGY STAR® com r a typically configured PC feat	pliant configurations, then uring a hard disk drive, a high		
Heat Dissipation*	computers. If a model family doe energy efficiency data listed is fo	s not offer ENERGY STAR® com r a typically configured PC feat	pliant configurations, then uring a hard disk drive, a high		
Heat Dissipation* Normal Operation (Short idle)	computers. If a model family doe energy efficiency data listed is fo efficiency power supply, and a Mi	s not offer ENERGY STAR® com r a typically configured PC feat crosoft Windows® operating sy	pliant configurations, then uring a hard disk drive, a high ystem.		
	computers. If a model family doe energy efficiency data listed is fo efficiency power supply, and a Mi 115VAC, 60Hz	s not offer ENERGY STAR® com r a typically configured PC feat crosoft Windows® operating sy 230VAC, 50Hz	pliant configurations, then uring a hard disk drive, a high ystem. 100VAC, 50Hz		
Normal Operation (Short idle)	computers. If a model family doe energy efficiency data listed is fo efficiency power supply, and a Mi 115VAC, 60Hz 107.1 BTU/hr	s not offer ENERGY STAR® com r a typically configured PC feat crosoft Windows® operating sy 230VAC, 50Hz 110.2 BTU/hr	pliant configurations, then uring a hard disk drive, a high ystem. 100VAC, 50Hz 107.3 BTU/hr		
Normal Operation (Short idle) Normal Operation (Long idle)	computers. If a model family doe energy efficiency data listed is fo efficiency power supply, and a Mi 115VAC, 60Hz 107.1 BTU/hr 107.1 BTU/hr	s not offer ENERGY STAR® com r a typically configured PC feat crosoft Windows® operating sy 230VAC, 50Hz 110.2 BTU/hr 110.2 BTU/hr	pliant configurations, then uring a hard disk drive, a high ystem. 100VAC, 50Hz 107.3 BTU/hr 107.3 BTU/hr		
Normal Operation (Long idle) Sleep	computers. If a model family doe energy efficiency data listed is fo efficiency power supply, and a Mi 115VAC, 60Hz 107.1 BTU/hr 107.1 BTU/hr 2.8 BTU/hr	s not offer ENERGY STAR® com r a typically configured PC feat crosoft Windows® operating sy 230VAC, 50Hz 110.2 BTU/hr 110.2 BTU/hr 2.9 BTU/hr 0.8 BTU/hr	pliant configurations, then uring a hard disk drive, a high ystem. 100VAC, 50Hz 107.3 BTU/hr 107.3 BTU/hr 2.9 BTU/hr 0.8 BTU/hr		



	Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.		
Additional Information	 This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC. This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC. This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see www.epeat.net Plastics parts weighing over 25 grams used in the product are marked per IS011469 and IS01043. This product is 98.2% recycle-able when properly disposed of at end of life. 		
Packaging Materials	External:	PAPER/Corrugated	4820 g
		PAPER/Paper	70 g
	Internal:	PLASTIC/Polyethylene Expanded – EPE	140 g
		packaging material contains at least 64.3% recycle	
	-	ated paper packaging materials contains at least 0.0	
RoHS Compliance	 HP Inc. complies fully with materials regulations. We were among the first companies to extend the restrictions in the European Union (EU) Restriction of Hazardous Substances (RoHS) Directive to our products worldwide through the HP GSE. HP has contributed to the development of related legislation in Europe, as well as China, India, and Vietnam. We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products. We met our voluntary objective to achieve worldwide compliance with the new EU RoHS requirements for virtually all relevant products by July 2013, and we will continue to extend the scope of the commitment to include further restricted substances as regulations continue to evolve. 		
	To obtain a copy of the HP RoHS Compliance Statement, see HP RoHS position statement.		
Material Usage	This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at https://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c05998906): • Asbestos • Certain Azo Colorants • Certain Brominated Flame Retardants – may not be used as flame retardants in plastics • Cadmium • Chlorinated Hydrocarbons • Chlorinated Paraffins • Bis(2-Ethylhexyl) phthalate (DEHP) • Benzyl butyl phthalate (BBP)		
	• Diis • Forr	utyl phthalate (DBP) obutyl phthalate (DIBP) maldehyde ogenated Diphenyl Methanes	



	 Lead carbonates and sulfates Lead and Lead compounds
	Mercuric Oxide Batteries
	 Nickel – finishes must not be used on the external surface designed to be frequently bandled or carried by the user
	 handled or carried by the user. Ozone Depleting Substances
	 Polybrominated Biphenyls (PBBs)
	 Polybrominated Biphenyl Ethers (PBBEs)
	 Polybrominated Biphenyl Oxides (PBBOs)
	 Polychlorinated Biphenyl (PCB)
	 Polychlorinated Diplenyl (PCD) Polychlorinated Terphenyls (PCT)
	 Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging
	has been voluntarily removed from most applications.
	Radioactive Substances
	Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
Packaging Usage	HP follows these guidelines to decrease the environmental impact of product packaging:
	 Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
	Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
	Design packaging materials for ease of disassembly.
	Maximize the use of post-consumer recycled content materials in packaging
	materials.
	 Use readily recyclable packaging materials such as paper and corrugated materials. Poduce size and weight of packages to improve transportation fuel officiency.
	 Reduce size and weight of packages to improve transportation fuel efficiency. Plastic packaging materials are marked according to ISO 11469 and DIN 6120
	standards.
End-of-life Management and	HP offers end-of-life HP product return and recycling programs in many geographic areas. To
Recycling	recycle your product, please go to:
	https://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c05403198 or contact your
	nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in
	a responsible manner.
	The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment
	······································
	information for each product type for use by treatment facilities. This information (product
	information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: HP Product
	disassembly instructions) is posted on the Hewlett Packard web site at: HP Product Disassembly Instruction Website. These instructions may be used by recyclers and other
	disassembly instructions) is posted on the Hewlett Packard web site at: HP Product Disassembly Instruction Website. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP
	disassembly instructions) is posted on the Hewlett Packard web site at: HP Product Disassembly Instruction Website. These instructions may be used by recyclers and other
HP, Inc. Corporate	disassembly instructions) is posted on the Hewlett Packard web site at: HP Product Disassembly Instruction Website. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP
HP, Inc. Corporate Environmental Information	disassembly instructions) is posted on the Hewlett Packard web site at: HP Product Disassembly Instruction Website. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment. For more information about HP's commitment to the environment:
	disassembly instructions) is posted on the Hewlett Packard web site at: HP Product Disassembly Instruction Website. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment. For more information about HP's commitment to the environment: Sustainable Impact Report
	disassembly instructions) is posted on the Hewlett Packard web site at: HP Product Disassembly Instruction Website. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment. For more information about HP's commitment to the environment: Sustainable Impact Report https://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c06040843
	disassembly instructions) is posted on the Hewlett Packard web site at: HP Product Disassembly Instruction Website. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment. For more information about HP's commitment to the environment: Sustainable Impact Report https://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c06040843 Eco-label certifications
	disassembly instructions) is posted on the Hewlett Packard web site at: HP Product Disassembly Instruction Website. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment. For more information about HP's commitment to the environment: Sustainable Impact Report https://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c06040843 Eco-label certifications https://www.hp.com/us-en/sustainable-impact/document-
	disassembly instructions) is posted on the Hewlett Packard web site at: HP Product Disassembly Instruction Website. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment. For more information about HP's commitment to the environment: Sustainable Impact Report https://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c06040843 Eco-label certifications https://www.hp.com/us-en/sustainable-impact/document- reports.html#filters_documents_reports=document_type-
	disassembly instructions) is posted on the Hewlett Packard web site at: HP Product Disassembly Instruction Website. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment. For more information about HP's commitment to the environment: Sustainable Impact Report https://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c06040843 Eco-label certifications https://www.hp.com/us-en/sustainable-impact/document- reports.html#filters_documents_reports=document_type- type_energy_star,type_epeat,type_tcoISO
	disassembly instructions) is posted on the Hewlett Packard web site at: HP Product Disassembly Instruction Website. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment. For more information about HP's commitment to the environment: Sustainable Impact Report https://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c06040843 Eco-label certifications https://www.hp.com/us-en/sustainable-impact/document- reports.html#filters_documents_reports=document_type-
	disassembly instructions) is posted on the Hewlett Packard web site at: HP Product Disassembly Instruction Website. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment. For more information about HP's commitment to the environment: Sustainable Impact Report https://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c06040843 Eco-label certifications https://www.hp.com/us-en/sustainable-impact/document- reports.html#filters_documents_reports=document_type- type_energy_star,type_epeat,type_tcoISO ISO 14001 certificates:



footnotes	Percentage of ocean-bound plastic contained in each component varies by product
	 Recycled plastic content percentage is based on the definition set in the IEEE 1680.1- 2018 standard.
	 External power supplies, WWAN modules, power cords, cables and peripherals excluded.
	 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers.
	• Fiber cushions made from 100% recycled wood fiber and organic materials.
	 Plastic cushions are made from >90% recycled plastic.
	 Disclaimer: recycled metal is expressed as a percentage of the total weight of the
	metal according to ISO 14021 definitions for metal parts over 25 grams.



Technical Specifications

© Copyright 2025 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



Summary

Change Log			
August 8, 2024	V1 to V2	Updated	Panel Specification Section
November 6, 2024	V2 to V3	Updated	Package specification & Swivel
November 14, 2024	V3 to V4	Updated	Package specification & Swivel
November 29, 2024	V4 to V5	Added	HP Client Management Script Library (CMSL)
December 11, 2024	V5 to V6	Updated	HP Client Management Script Library (CMSL) Footnote
March 7, 2025	V6 to V7	Updated	Zero Bright Dot Warranty

